


# ZL-S3020/3021

3U/19-inch standard server chassis,  
supports up to ATX motherboards

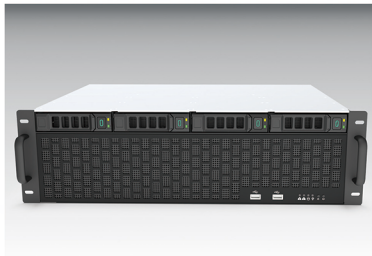

## 技术参数

机箱形态	机架式
机箱高度	3U
适应主板	ATX/Micro-ATX及以下
背板	直连SAS/SATA背板, 或者可选4.0 NVMe/SAS/SATA背板
磁盘位	标配支持4块3.5/2.5热插拔硬盘位
硬盘防震	硬盘架采用EMI弹片设计, 独有防震风扇设计, 降低风扇与硬盘间共振, 不影响硬盘I/O速度
系统风扇	支持智能温控, 标配3个8025风扇, 最多支持4x8025风扇, 后置2x6025风扇
扩展卡位	5个全高的PCIe扩展卡位
前板控制	2个USB 2.0, 1个开关键, 1个重启键, 1个UID, 1个硬盘指示灯, 1个系统故障灯, 1个网络指示灯
滑轨	选配
产品材质	进口SGCC(镀锌钢板)
机箱尺寸	362 x 438 x 134mm
机箱毛重	11kg
包装尺寸	477 x 553 x 264mm

## Features

- 主板最大支持ATX及以下规格
- 直连SAS/SATA背板, 或者可选4.0 NVMe/SAS/SATA背板
- 支持ATX电源
- 智能温控, 最多支持4x8025风扇, 2x6025风扇

## Technical Parameter

Chassis style	rack type
Chassis height	3U
Supported Motherboards	ATX/Micro ATX and below
backplane	Directly connected to SAS/SATA backplane, or optional 4.0 NVMe/SAS/SATA backplane
Disk slot	Standard configuration supports 4 3.5/2.5 hot swappable hard drive slots
Hard drive shockproof	The hard drive rack adopts EMI shrapnel design and a unique shock-absorbing fan design to reduce resonance between the fan and the hard drive, without affecting the I/O speed of the hard drive
System fan	Supports intelligent temperature control, comes standard with 3 8025 fans, supports up to 4x8025 fans, and rear 2x6025 fans
Expansion slot	5 full height PCIe expansion card slots
Front panel control	2 USB 2.0, 1 power button, 1 restart button, 1 UID, 1 hard disk indicator light, 1 system fault light, 1 network indicator light
slide rail	optional
Product Material	Imported SGCC (galvanized steel sheet)
Case size	362 x 438 x 134mm
Case gross weight	11kg
Package dimensions	477 x 553 x 264mm

